

TABLE
RADIAL
FACT SHEET



TABLE RADIAL



Nominated
2015


The entry-level model of the RADIAL product line has been designed to meet the requirements of the modern office. With only minor differences in equipment, it offers the same features as the PRO model, which is ten centimetres higher and contributes to making work easier on a long-term basis.

TECHNICAL DATA

TABLE RADIAL	
Product #	9201
Colours	01 black 02 white 23 aluminium
Dimensions	Height: 300 mm–750 mm
	Radius: 100 mm–550 mm
	Lamp base (Ø): 250 mm x 8 mm
Material	Aluminium, zinc, steel (lamp base), plastic
Weight	4,5 kg
Energy efficiency	A++*
Protection type	IP 20
Protection class	III ⚡
Illuminants	
LEDs	2 cold white & 2 warm white LEDs (CREE)
Power consumption	9,5 W**
Luminous flux of luminaire:	neutral white 680 lm*
Light intensity	neutral white 566 cd*
Illuminance	1,000 lux at a height of 60 cm
Luminous efficiency	neutral white 73 lm/W*
Colour temperature (CCT)	2.700 K/3.600/6.500 K
Colour reproduction index	≥ 80
Operating temperature on lamp head	≤ 40°C at 25°C ambient temperature
Burning life	over 50,000 hours
Standby consumption	≤ 0,5 W
Nominal voltage	12–14 V DC
Protection class	II ☐
VITACORE®	
Operation	via VITACORE® electronics
Light strength setting	in 5 steps up to 1,000 lux
Setting of light colour	in 3 steps 2,700 / 3,600 / 6,500 K
Touch panel	made of acrylic glass
Power supply unit	
Desktop power supply	Europlug & BS 1363 (British 3-pin) plug
DC cable length	1,5 m
Nominal voltage	100–240 V, 50–60 Hz
Power consumption	1,5 A
Output	max. 12 V, 48 W, 4 A DC


*with warm white and cold white LEDs switched on
 **with cold white LEDs switched on to 100%

TECHNICAL VIEW

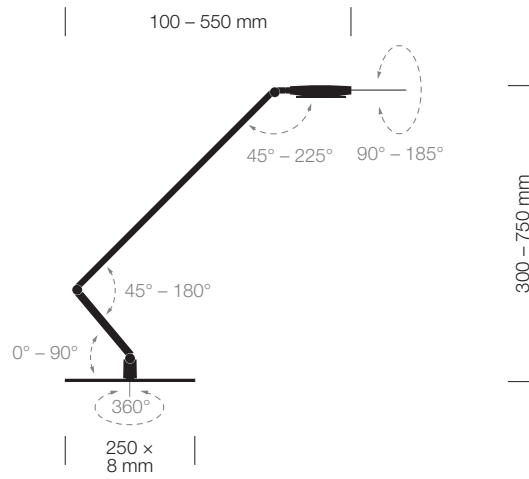

RADIAL TABLE
9202

LIGHT INTENSITY DISTRIBUTION

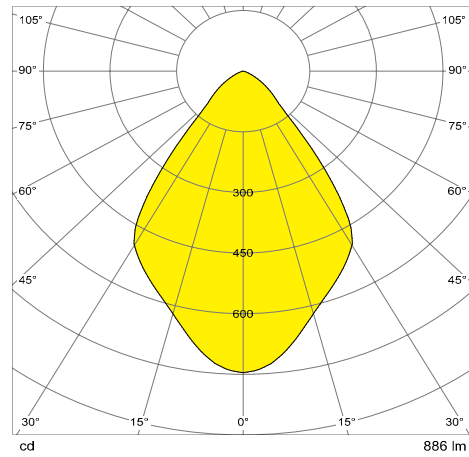

Free download on
www.luctra.eu

LUCTRA

LUCTRA® is a brand of
DURABLE · Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77–79 · 58636 Iserlohn
P.O. Box 1753 · 58634 Iserlohn · Germany
Phone +49 2371 662445
info@luctra.eu · www.luctra.eu