

VITAWORK[®] 17

FACT SHEET



VITAWORK® 17



TECHNICAL DATA

VITAWORK® 17	
Colours	Metallic Silver/Black
Dimensions	Height: 2,040 mm
	Luminaire head (W x D x H): 542 mm x 370 mm x 32,5 mm
	Ceiling height clearance: > 2 m
Lamp base	C-shaped
Material	Aluminium, Steel (lamp base), Plastic (touch panel & side caps)
Energy efficiency	A++
Protection type	IP 20
Protection class	I ⚡

Illuminants	
Fitted with	LED
Power consumption	123 W
Light distribution	Asymmetric or Symmetric
Luminous flux direct	1,566 lm
Luminous flux indirect	14,323 lm
Nominal luminous flux	17,000 lm
Luminous efficiency	130 lm/W
Colour temperature (CCT)	4,000 K
Colour tolerance	< 3 SDCM
50,000 h	L85B10
UGR	< 19
Colour reproduction index	≥ 80
LED life	over 50,000 hours
Shock-proof plug	Schuko-plug (Typ F)*
Standby consumption	≤ 0,5 W


VITACORE®	
Operation	per VITACORE® Elektronik und Sensorik
Light intensity setting	stufenlos direkt & indirekt getrennt, am Touchpanel
Sensors	Infrarot Präsenzsensoren & Lichtstärkesensoren

Article overview			
Article number	Luminaire	Light Distribution	Control
9249-140	VITAWORK® 17 Asym. PIR	Asymmetric	PIR
9252-140	VITAWORK® 17 Sym. PIR	Asymmetric	dimmbare
9253-140	VITAWORK® 17 Asym. Dim	Symmetric	PIR
9254-140	VITAWORK® 17 Sym. Dim	Symmetric	dimmbare

*Additional plugs are available. Article numbers differ. Please contact us.




TECHNICAL VIEW

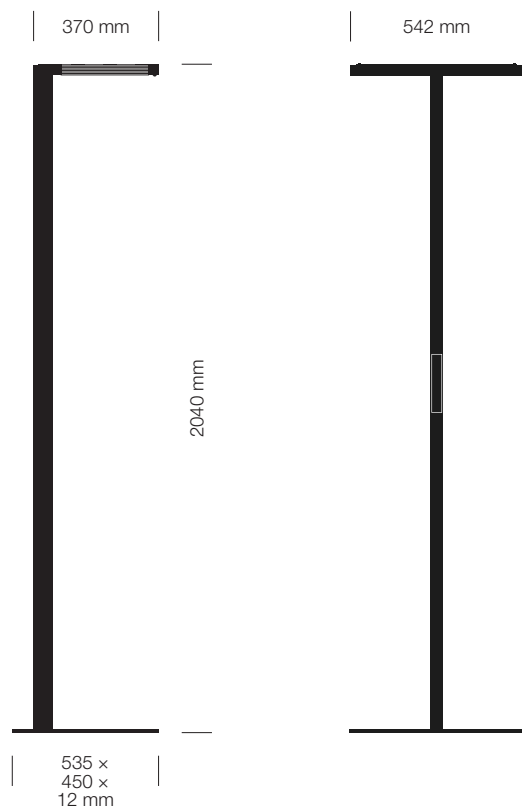


LIGHT DISTRIBUTION CURVE

VITAWORK®
9241/9242/9245/9246/9249

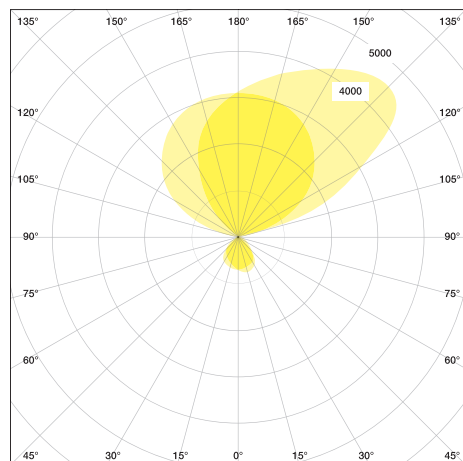

VITAWORK®
9243/9244/9247/9248/9252

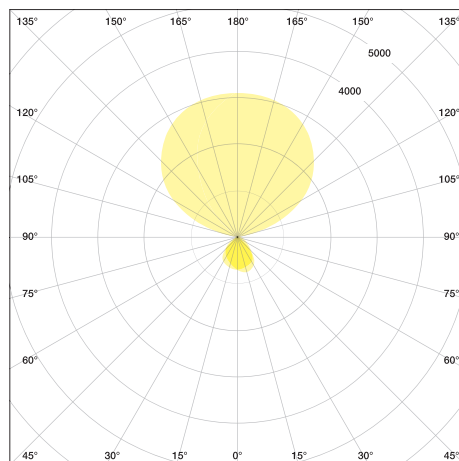

Free download at www.luctra.eu

LUCTRA

LUCTRA® is a brand of
DURABLE · Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77–79 · 58636 Iserlohn
P.O. Box 1753 · 58634 Iserlohn · Germany
Phone +49 2371 662445
info@luctra.eu · www.luctra.eu