

FLOOR TWIN[®]


Fact Sheet

TECHNICAL DATA


	FLOOR TWIN LINEAR	FLOOR TWIN RADIAL
Product	9237	9238
Colours	01 black 02 white 23 aluminium	
Dimensions	Height: 2.025 mm	
	Radius: 100 mm–930 mm	Radius: 100 mm–730 mm
	Lamp base: (W×D×H): 380 mm×380 mm×8 mm	Lamp base: (Ø): 380 mm×8 mm
Material	Aluminium, zinc, steel (lamp base), glass, plastic	
Weight	12,5 kg	
Energy efficiency	This product contains (a) light source(es) with the energy efficiency class(es) Light source no. 16684, energy efficiency class D (Reg. 880999)	
Protection type	IP 20	
Protection class	III ⚡	
Illuminants		
LEDs	2 cold white & 2 warm white LEDs each	
Power consumption	25 W**	
Nominal luminous flux	neutral white 680 lm*	
Light intensity	neutral white 566 cd*	
Illuminance	1,000 lux at a height of 110 cm	
Luminous efficiency	neutral white 73 lm/W*	
Colour temperature (CCT)	2.700 K <-----> 6.500 K	
Colour reproduction index	≥ 80	
Operating temperature on lamp head	≤ 40°C at 25°C ambient temperature	
Burning life	over 50,000 hours	
Standby consumption	≤ 0,5 W	
Nominal voltage	12 V DC	
Protection class	II ☑	
VITACORE[®]		
Operation	via VITACORE [®] electronics or app	
Light intensity setting	stepless up to 1,000 lux	
Setting of light colour	stepless between 2,700 and 6,500 Kelvin	
Switch Function	For separate operation of lamp heads	
Touch panel	made of glass	
Power supply unit		
Desktop power supply	Europlug & BS 1363 (British 3-pin) plug	
AC cable length	1,2 m	
DC cable length	1,8 m	
Nominal voltage	100–240 V, 50–60 Hz	
Power consumption	1,5 A	
Output	max. 12 V, 48 W, 4 A DC	

TECHNICAL VIEW


FLOOR LINEAR
TWIN
9237

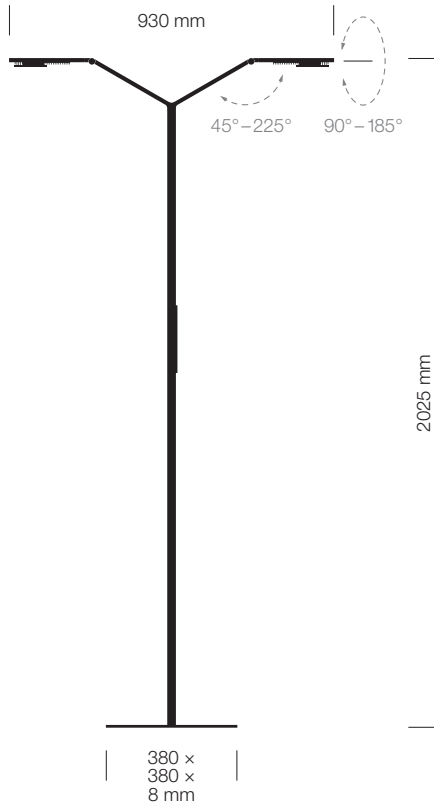

FLOOR RADIAL
TWIN
9238

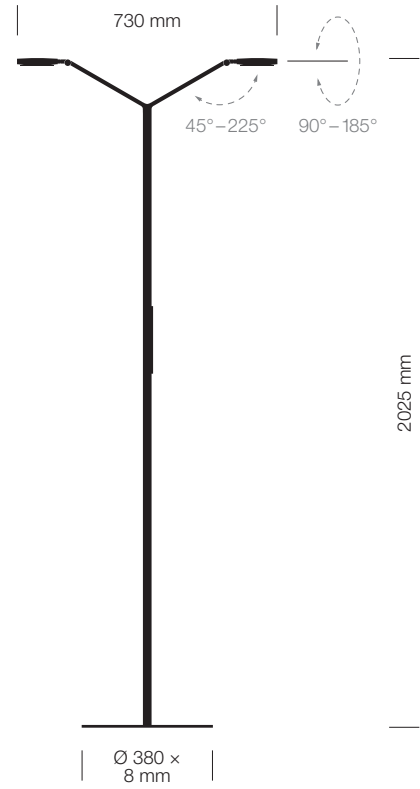

LIGHT DISTRIBUTION CURVE

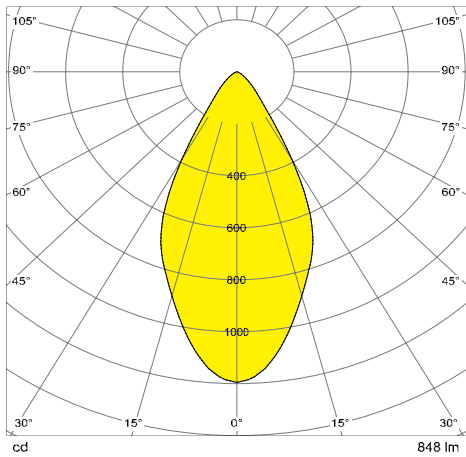

Free download at www.luctra.eu



LUCTRA® is a brand of
DURABLE · Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77-79 · 58636 Iserlohn
Postfach 1753 · 58634 Iserlohn
Tel.: +49 23 71 66 24 45
info@luctra.eu · www.luctra.eu