

TABLE[®]

Fact Sheet

TECHNICAL DATA

	TABLE LINEAR	TABLE RADIAL
Product	9201	9202
Colours	01 black 02 white 23 aluminium	
Dimensions	Height: 300 mm – 750 mm	
	Radius: 100 mm – 650 mm	Radius: 100 mm – 550 mm
	Lamp base: (W × D × H): 250 mm × 250 mm × 8 mm	Lamp base: (Ø): 250 mm × 8 mm
Material	Aluminium, zinc, steel (lamp base), plastic	
Weight	6 kg	4,5 kg
Energy efficiency	This product contains (a) light source(es) with the energy efficiency class(es) Light source no. 16684, energy efficiency class D (Reg. 880999)	
Protection type	IP 20	
Protection class	III ⚡	
Illuminants		
LEDs	2 cold white & 2 warm white LEDs	
Power consumption	9,5 W**	
Luminous flux of luminaire:	neutral white 680 lm*	
Light intensity	neutral white 566 cd*	
Illuminance	1,000 lux at a height of 60 cm	
Luminous efficiency	neutral white 73 lm/W*	
Colour temperature (CCT)	2.700 K / 3.600 / 6.500 K	
Colour reproduction index	≥ 80	
Operating temperature on lamp head	≤ 40°C at 25°C ambient temperature	
Burning life	over 50,000 hours	
Standby consumption	≤ 0,5 W	
Nominal voltage	12–14 V DC	
Protection class	II ☑	
VITACORE[®]		
Operation	via VITACORE [®] electronics	
Light intensity setting	in 5 steps up to 1,000 lux	
Setting of light colour	in 3 steps 2,700 / 3,600 / 6,500 K	
Touch panel	made of acrylic glass	
Power supply unit		
Desktop power supply	Europlug & BS 1363 (British 3-pin) plug	
DC cable length	1,5 m	
Nominal voltage	100–240 V, 50–60 Hz	
Power consumption	1,5 A	
Output	max. 12 V, 48 W, 4 A DC	

TECHNICAL VIEW

TABLE LINEAR
9201



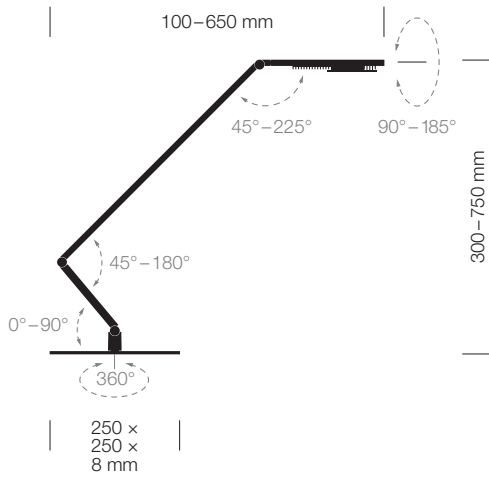


TABLE RADIAL
9202

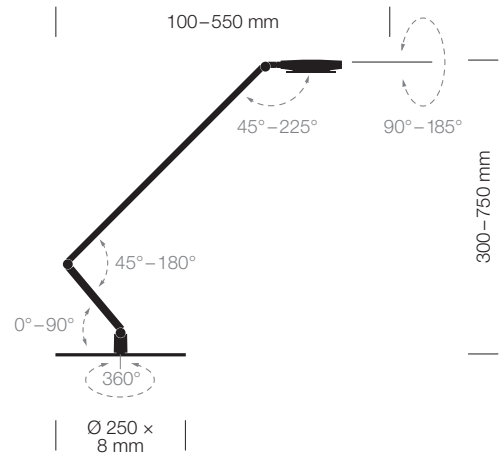

LIGHT DISTRIBUTION CURVE

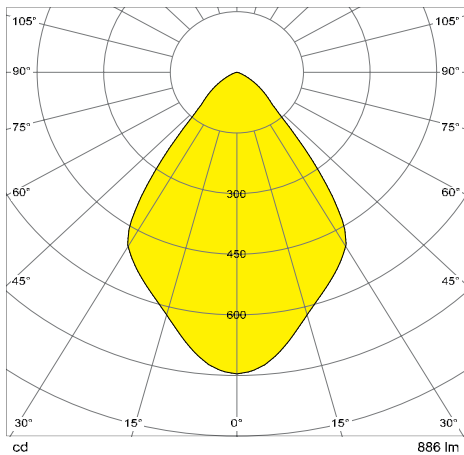

Free download at www.luctra.eu



LUCTRA® is a brand of
 DURABLE · Hunke & Jochheim GmbH & Co. KG
 Westfalenstraße 77-79 · 58636 Iserlohn
 Postfach 1753 · 58634 Iserlohn
 Tel.: +49 23 71 66 24 45
 info@luctra.eu · www.luctra.eu